

**Class 1**  
 Discharge < 5 mg/l  
 From 1.5 to  
 30 l/s

# Oil separator



## With sludge trap and coalescing filter

- Polyethylene tank produced by rotomoulding.
- Polyethylene inlet/outlet device with nitrile sleeves.
- Removable polyethylene inner wall, with filter holder and coalescing filter.
- Polyethylene automatic closure device, rated 0.85 (other density on demand).
- Polyethylene cover for pedestrian traffic, with stainless steel screws.



**OPTIONS**  
 (see page 28 & 29)

- Extension of cover.
- Visual and audible alarm.



In case of shipment from Poland, slight differences exist in the dimensions. Ask us



Ref EH05	Size l/s	L	P	H	E	S	Fe	Dn	Volume		Weight	Optional extension				
									Sludge trap	Separator		H 700	Fr min max	H 1000	Fr min max	
EH0501C	1.5	1282	780	891	575	530	361	110	150	190	50	RE107	750	-	-	-
EH0503C	3	1282	780	1321	1005	960	361	110	300	350	75	RE107	1000	-	-	-
EH0506C	6	1882	1160	1460	1015	938	522	160	630	770	150	RE207	830	-	RE210	880
EH0508C	8	1882	1160	1975	1530	1453	522	160	980	1420	184	RE207	1130	-	RE210	1480
EH0510C	10	1882	1160	1975	1530	1453	522	160	1080	1320	194	RE207	1130	-	RE210	1480

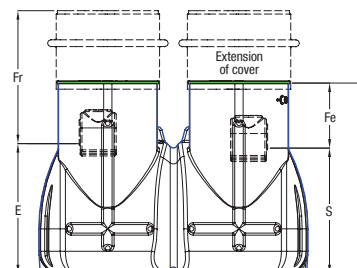

Ref EH05	Size l/s	L	P	H	E	S	Fe	Dn	A	Volume		Weight	Optional extension (x 2 units)				
										Sludge trap	Separator		H 700	Fr min max	H 1000	Fr min max	
EH0515C	15	2400	1624	1700	1160	1120	580	200	457	1500	1730	229	RE207	932	-	RE210	982
EH0520C	20	2400	1624	2072	1532	1492	580	200	457	2000	2060	257	RE207	1232	-	RE210	1582

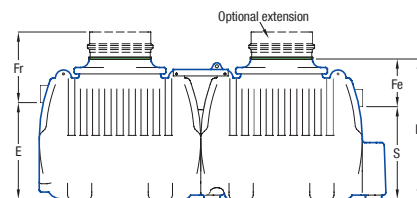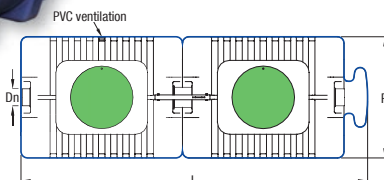

Ref DHFE	Size l/s	L	P	H	E	S	Fe	Dn	Volume		Weight	Optional extension (x 2 units)				
									Sludge trap	Separator		H 250 to 450 mm	Fr min max	H 430 to 600 mm	Fr min max	
DHF125E	25	4292	1500	1730	1200	1150	580	200	2500	3700	312	ETR47ET	780	-	ETR65ET	960
DHF130E	30	4300	1555	1730	1200	1150	580	200	3000	3200	317	ETR47ET	980	-	ETR65ET	1130

Dimensions are given in mm, weights in kg, volumes in liters.

Oil separator  
 Polyethylene Steel Options

Grease separator  
 Polyethylene Steel Options

Installation

**EH05** ELLIPSE range  
 1.5 • 3 • 6 • 8 • 10 • 15 • 20 l/s

**DHFE** ARONDE range  
 25 • 30 l/s