

# EFFLUENT PUMPS

## Features:

- IP 68 Protection and F Class insulation.
- Low temperature rising durable for long service life.
- Built in thermal overload protector.
- Double mechanical seal available for 1HP and above.
- High efficiency hydraulic suction for energy saving.

## Applications:


- Drainage of cellar.
- Groundwater effluent.
- Civil engineering & construction.
- Agriculture and irrigation.
- Tunnel and caisson drainage.



## KS Series




## PERFORMANCE CURVE

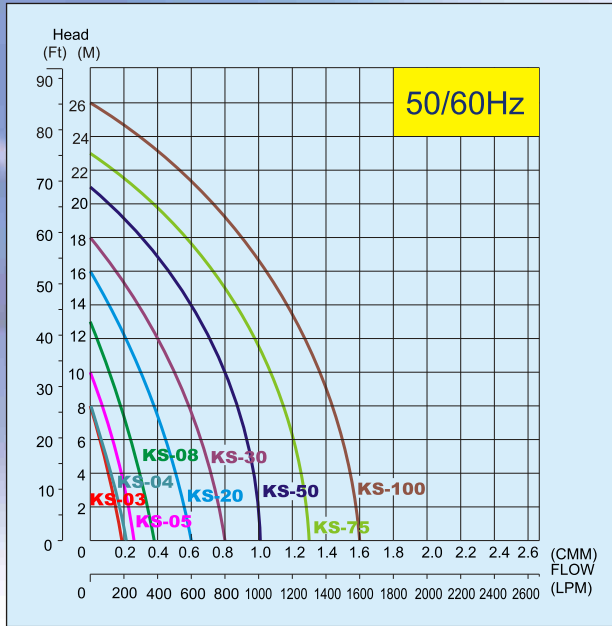

# KS Series



## CONSTRUCTION

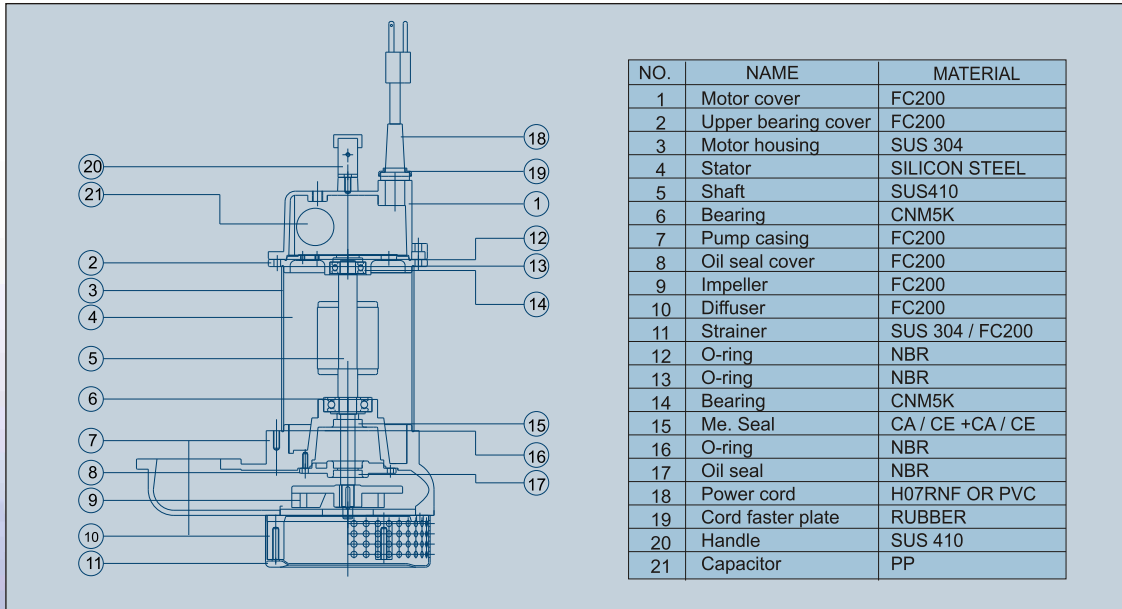

## SPECIFICATION

Type	Output		Discharge		Rated		Maximum		Weight	Dimension		
					Head	Capacity	Head	Capacity				
	HP	kW	mm	Inch	M	LPM	M	LPM		Kg	L(mm)	W(mm)
KS-03	1/3	0.25	40	1 1/2"	3	130	8	180	9	188	141	305
KS-04	1/2	0.4	50	2"	5	150	8	220	11	208	140	359
KS-05	1/2	0.4	50	2"	5	160	10	260	14	230	156	375
KS-08	1	0.75	50(80)	2"(3")	6	240	13	380	21	290	180	425
KS-20	2	1.5	80	3"	10	300	16	600	31	278	182	475
KS-30	3	2.2	80	3"	10	500	18	800	42	390	250	450
KS-50	5	3.7	100	4"	10	800	21	1100	48	450	240	530
KS-75	7.5	5.6	100	4"	15	800	23	1300	60	550	310	590
KS-100	10	7.5	150	6"	18	900	26	1600	70	550	310	610

Remark: KS-03A/04A/05A/08A are equipped with float switch.



## Hung Pump Group

16 Lien-Ming Street, Ba-De City 334,  
Taoyuan, Taiwan  
TEL:(886) -3-371-3969  
FAX:(886) -3-371-3960  
E-Mail: hungpump@ms9.hinet.net